
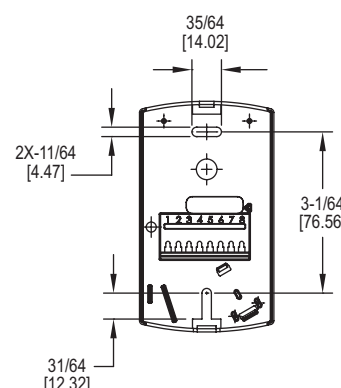


WALL MOUNT HUMIDITY/TEMPERATURE TRANSMITTER

2% or 3% Humidity Sensor, Passive Temperature Outputs

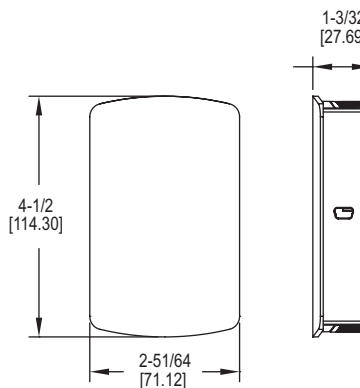

The **Series RHPLC Wall Mount Humidity/Temperature Transmitter** is a compact economical sensor for the building automation marketplace. The stylish housing is well vented to provide air flow across the sensor to improve measurement accuracy. Each unit utilizes a capacitive polymer sensing element to deliver a proportional analog output. A combination humidity and temperature model can be configured with current, voltage, RTD, or thermistor output. A wide selection of passive RTD or thermistor temperature sensors are available in this series.

FEATURES/BENEFITS

- 2% or 3% accuracy models
- Humidity only or temperature and humidity combo
- Wide selection of passive thermistor or RTD temperature sensors

APPLICATIONS

- Air economizers
- Room comfort monitoring

SPECIFICATIONS

Sensor: Capacitive polymer.
Relative Humidity Range: 0-100% RH.
RH Accuracy: $\pm 2\%$ 10 to 90% RH @ 25°C for 2% accuracy units; $\pm 3\%$ 20 to 80% RH @ 25°C for 3% accuracy units.
RH Hysteresis: $\pm 0.8\%$.
RH Repeatability: $\pm 0.1\%$ typical.
Temperature Output Range: -40 to 140°F (-40 to 60°C).
Passive Thermistor Temperature Sensor Accuracy: $\pm 0.36^\circ\text{F}$ @ 77°F ($\pm 0.2^\circ\text{C}$ @ 25°C).
Accuracy RTD Temp Sensor: DIN Class B; $\pm 0.3^\circ\text{C}$ @ 0°C ($\pm 0.54^\circ\text{F}$ @ 77°F).
Accuracy Current/Voltage Temperature Output: $\pm 0.9^\circ\text{F}$ @ 72°F ($\pm 0.3^\circ\text{C}$ @ 25°C).
Temperature Limits: Operating: -40 to 140°F (-40 to 60°C); Storage: -40 to 176°F (-40 to 80°C).
Power Requirements: 10-35 VDC for 4-20 mA or 0-5 VDC output; 15-35 VDC for 0-10 VDC output; 10-29 VAC for 0-5 VDC output; 15-29 VAC for 0-10 VDC output.
Response Time: 8 s (τ_{63}).
Electrical Connections: Screw terminal block.
Drift: $< 0.25\%$ RH/year.
Enclosure Material: Polycarbonate.
Weight: 4.4 oz (125 g).
Agency Approvals: CE.

MODEL CHART							
Example	RHPLC	-3	N	2	A	-FC	RHPLC-3N2A-FC
Series	RHPLC						Humidity/temperature transmitter
Accuracy		2					2% accuracy
		3					3% accuracy
Housing			N				North American style wall mount
Humidity Output				1			Current 4-20 mA
				2			Voltage 0-10 VDC
				3			Voltage 0-5 VDC
Temperature Output				0			None
				1			Current 4-20 mA
				2			Voltage 0-10 VDC
				3			Voltage 0-5 VDC
				A			10K Ω @ 25°C thermistor type III
				B			10K Ω @ 25°C thermistor type II
				C			3K Ω @ 25°C thermistor
				D			100 Ω RTD DIN 385
Options				E			1K Ω RTD DIN 385
				F			20K Ω @ 25°C thermistor
						FC	Factory calibration certificate (3% accuracy units)

ACCESSORIES	
Model	Description
SCD-PS	100-240 VAC/VDC to 24 VDC power supply
APT-40-5DN	AC power transformer, 120/208/240/277/480 VAC input, 24 VAC isolated output, 40 VA, dual hub